

CONDUITS & ACCESSORIES

CATALOGUE



STEEL CONDUITS

MALLEABLE IRON FITTINGS
& ACCESSORIES

FLEXIBLE CONDUIT SYSTEMS



SMART^{Tr}

Your Trusted Partner in
Electrical & Mechanical Support

1 | **INTRODUCTION**
Some Good Reasons To Use SMARTr Products

2 | **BRITISH STANDARD G.I. CONDUITS**
BS 4568 Class 3 & Class 4 Conduits
IEC 61386 - 21 : 2004, IEC 60614 - 2 - 1 : 1993, BS EN 50086 - 2 - 1 : 1996

Epoxy Powder Coated Conduits
BS 4568 : PT1 : 1970, BS EN 61386 - 21 : 2004

3 | Cable Capacities Of Conduits
Straight Runs Not Exceeding 3 Metres In Length
Straight Runs Not Exceeding 3 Metres In Length Or Runs Of Any Length
Spacing Support For Conduits

4 | **FITTINGS & ACCESSORIES**
BOXES - CIRCULAR, SMALL (20 & 25mm)
Terminal Box 1 Way
Through Box 2 Ways
Angle Box 2 Ways
Tee Box 3 Ways
Cross Box 4 Ways
Terminal Box -1 Way W/Back Hole
Boxes With Back Hole Outlet
Twin Thru 'U' Box 2 Ways
Twin Thru 'H' Box 4 Ways
Branch 'Y' Box 3 Ways
Looping Box

5 | **BOXES - CIRCULAR, LARGE (32mm)**
Terminal Box 1 Way
Through Box 2 Ways
Angle Box 2 Ways
Tee Box 3 Ways
Cross Box 4 Ways

BOXES - CIRCULAR, SPECIAL DEEP

EXTENSION RING
Circular Box Extension Ring

6 | **COVERS**
Circular Cover - Small/Large
Rubber Gasket
Dome Lid
Ball & Socket

BENDS, ELBOWS AND TEES
Inspection Elbow
Inspection Tee
Inspection Bend
Solid Bend
Solid Long Bend

7 | **COUPLINGS**
Coupling
Flange Coupling
Screwless Coupling
Expansion Coupler
Short Nipple

7 | **CONDUIT FIXING**
Spacer Bar Saddle
Plain Saddle

8 | Half Saddle
Conduit Pipe Clamp
Kon-Clip
Heavy Duty - Distance Saddle
Pipe Hanger

8 | **REDUCERS, PLUGS**
Conduit Pipe Reducer
Stopping Plug

9 | **BUSHINGS**
Short Male Bush
Short Female Bush
Long Male Bush

9 | **LOCKNUTS**
Locking Ring
Locknut

10 | **KNOCK-OUT & ADAPTABLE BOXES**
KNOCKOUT BOXES (SWITCH & SOCKET BOXES)
1 Gang K.O. Box (B54662 & Normal)
2 Gang K.O. Box (BS4662 & Normal)

10 | **STEEL ADAPTABLE BOXES**

11 | **FLEXIBLE CONDUIT SYSTEMS & ADAPTORS**
FLEXIBLE CONDUITS
Steel Flexible Conduit
P.V.C Coated Flexible Conduit
Low Smoke Zero Halogen (LSOH)
Liquid Tight Flexible Conduit
Stainless Steel Flexible Conduit
Spacing of Supports for Flexible Conduits

12 |

13 | **ADAPTORS**
Flexible Adaptor with Retaining Screw
Female Adaptor
Nickel Plated Adaptor (2pc) Male Adaptor
Liquid/Water Tight Nickel Plated 2 Part Brass Male Adaptor (Heavy Gauge)
Liquid/Water Tight Adaptor

14 | **S.S. CONDUITS & FITTINGS**
Stainless Steel Conduits
Stainless Steel Fittings

15 | **E.M.T. CONDUITS & FITTINGS**
American Standard Electrical Metallic Tubing Dimensions
Application Tolerances of E.M.T. Conduits
Features of E.M.T. Conduit

E.M.T. FITTINGS
E.M.T. Conduit Couplings
E.M.T. Straps
E.M.T. Elbow 90

INTRODUCTION



Your Trusted
Partner
in Electrical &
Mechanical Support



SMARTr range of conduit products are OEM manufactured by SMARTr International, a ISO 9001:2000 Singapore company established since 1996.

Products available in this catalogue are manufactured to the highest quality according to the relevant standards mentioned.

In order to maintain product consistency, the company employs a strict set of QC discipline and procedures that are implemented at various stages of the manufacturing program; from raw material selection through to the inspection process, while **ensuring clients' full satisfaction upon receiving our finished products.**

As a result of the company's strict quality policy, our products are confidently and widely installed in major projects throughout Singapore and other regional markets.

Why is SMARTr Conduit better?



High quality mild steel which ensures superior bending and forming properties



Manufactured by cold forming and high frequency welding



Dimensionally accurate with uniform quality



Each length distinctly marked with embossed branding




Conduits are packed and securely bundled to ensure easily handling with maximum protection

CLASS 3 & CLASS 4 CONDUITS BS EN 61386 - 21 : 2004

CHARACTERISTICS & APPLICATIONS (CLASS 4)

- Supplied with one standard coupler per length
- Hot-Dipped Galvanized Sheradized
- Metric size threadings
- Smooth interior for easy cable pulling
- Higher protection against corrosion
- Suitable for outdoor use which requires higher level of corrosion protection
- 38MM/50MM conduits are also available; specifications available upon request
- Note: BS 4568 : Part 1 : 1970 and BS EN 50086-2-1 : 1996 are no longer valid

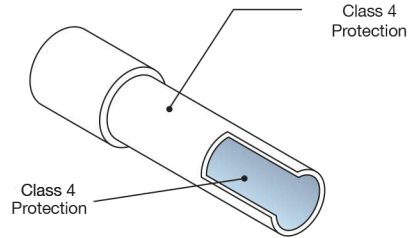

CLASS OF SURFACE PROTECTION	NOMINAL SIZE	ITEM CODE	OUTSIDE DIAMETER		NOMINAL THICKNESS	LENGTH W/O COUPLING	NO. OF LENGTHS PER BUNDLE	NO. OF BUNDLE PER LIFT	TOTAL LENGTHS PER LIFT
			MIN	MAX					
CLASS 4	20mm	CP-20-4-SMTR	19.7mm	20mm	1.6 ±0.15mm	3.75 metres	10	20	200
	25mm	CP-25-4-SMTR	24.6mm	25mm	1.6 ±0.15mm	3.75 metres	10	20	200
	32mm	CP-32-4-SMTR	31.6mm	32mm	1.6 ±0.15mm	3.75 metres	5	20	100

CHARACTERISTICS & APPLICATIONS (CLASS 3)

- Supplied with one standard coupler per length
- Metric size threadings
- Smooth interior for easy cable pulling
- Suitable for indoor use with lower levels of humidity
- 38MM/50MM conduits are also available; specifications available upon request
- Note: BS 4568 : Part 1 : 1970 and BS EN 50086-2-1 : 1996 are no longer valid

CLASS OF SURFACE PROTECTION	NOMINAL SIZE	ITEM CODE	OUTSIDE DIAMETER		NOMINAL THICKNESS	LENGTH W/O COUPLING	NO. OF LENGTHS PER BUNDLE	NO. OF BUNDLE PER LIFT	TOTAL LENGTHS PER LIFT
			MIN	MAX					
CLASS 3	20mm	CP-20-3-SMTR	19.7mm	20mm	1.6 ±0.15mm	3.75 metres	10	20	200
	25mm	CP-25-3-SMTR	24.6mm	25mm	1.6 ±0.15mm	3.75 metres	10	20	200
	32mm	CP-32-3-SMTR	31.6mm	32mm	1.6 ±0.15mm	3.75 metres	5	20	100

EPOXY POWDER COATED CONDUITS FOR CLASS 3 & CLASS 4 BS EN 61386 - 21 : 2004

CHARACTERISTICS & APPLICATIONS FOR EPOXY POWDER COATED CONDUITS (CLASS 3 & CLASS 4)

- Additional epoxy powder coating provides heavy surface corrosion protection to conduits
- Epoxy powder coated finishing provides excellent impact and scratch resistance
- Bending of epoxy conduit is not recommended. In the event if bending occurs, touch-up after bending is required
- Reduce cost of manpower needed for epoxy conduits against manual painting
- Supplied both ends threaded with one standard socket on one end
- Suitable for indoor and outdoor areas
- Colours to differentiate the types of M & E services

STANDARDS	SIZE	MODEL NO.	LENGTH W/O COUPLING	NO. OF LENGTHS PER BUNDLE	TOTAL LENGTHS PER LIFT
BS EN 61386 - 21 - 2004 (CLASS 3)	20mm	CP-20-E	3.75 metres	10	200
	25mm	CP-25-E	3.75 metres	10	200
	32mm	CP-32-E	3.75 metres	5	100
BS EN 61386 - 21 - 2004 (CLASS 4)	20mm	CP-20-4-E	3.75 metres	10	200
	25mm	CP-25-4-E	3.75 metres	10	200
	32mm	CP-32-4-E	3.75 metres	5	100

Note: Colours quoted are based on client's given colour code/sample and are supplied in bulk, subject to epoxy colour availability.

CABLE CAPACITIES OF CONDUIT

The following table provide guidance on the calculation of the number of single-core P.V.C insulated cables which can be located in various sizes of the conduits.

The following tables demonstrate 2 particular cases:

1. Single-core P.V.C insulated cables in straight runs not exceeding 3 metres in length.
2. Single-core P.V.C insulated cables in straight runs exceeding 3 metres in length or in runs of any length with bends or sets.

STRAIGHT RUNS NOT EXCEEDING 3 METRES IN LENGTH

For each type of cable being used, obtain the cable factor from Table 1. Sum all the cable factors and compare with the conduit factors given in Table 2.

The conduit sizes which can accommodate the cables are those with a conduit factor equal to or greater than the sum of the cable factors.

TYPE OF CONDUCTOR	CONDUCTOR CROSS-SECTIONAL AREA (mm ²)	FACTOR	CONDUIT DIA (mm)	FACTOR		
Solid	1	22	16	290		
	1.5	27				
	2.5	39				
Stranded	1.5	31			20	460
	2.5	43				
	4	58				
	6	88				
	10	146				
			25	800		
			32	1400		

Table 1 & 2 Cable factors for short straight runs. These tables are based on the 16th edition of the I.E.E Wiring Regulations Appendix 12.

STRAIGHT RUNS EXCEEDING 3 METRES IN LENGTH OR RUNS OF ANY LENGTH INCORPORATING BENDS OR SETS

For each type of cable being used, obtain the cable factor from Table 3.

Sum all the cable factors and compare with the conduit factor given in Table 4 for the relevant length of run and the number of bends and sets in that run.


The conduit sizes which will accommodate the cables are those with a conduit factor equal to or greater than the sum of the cable factors.

TYPE OF CONDUCTOR	CONDUCTOR CROSS-SECTIONAL AREA (mm ²)	FACTOR
Solid	1	16
	1.5	22
	2.5	30
Stranded	4	43
	6	58
	10	105

Table 3 Cable factors for long straight runs or runs incorporating bends.

LENGTH OF RUN (m)	CONDUIT DIAMETER (mm)																			
	16				20				25				32							
	STRAIGHT				ONE BEND				TWO BENDS				THREE BENDS				FOUR BENDS			
1					188	303	543	947	177	286	514	900	158	256	463	818	130	213	388	629
1.5					182	294	528	923	167	270	487	857	143	233	422	750	111	182	333	600
2	COVERED BY TABLES 1 & 2				177	286	514	900	158	256	463	818	130	213	388	692	97	159	292	529
2.5					171	278	500	878	150	244	442	783	120	196	358	643	86	141	260	474
3					167	270	487	857	143	233	422	750	111	182	333	600				
3.5	179	290	521	911	162	263	475	837	136	222	404	720	103	169	311	563				

Table 4 Cable factors for runs incorporating bends.

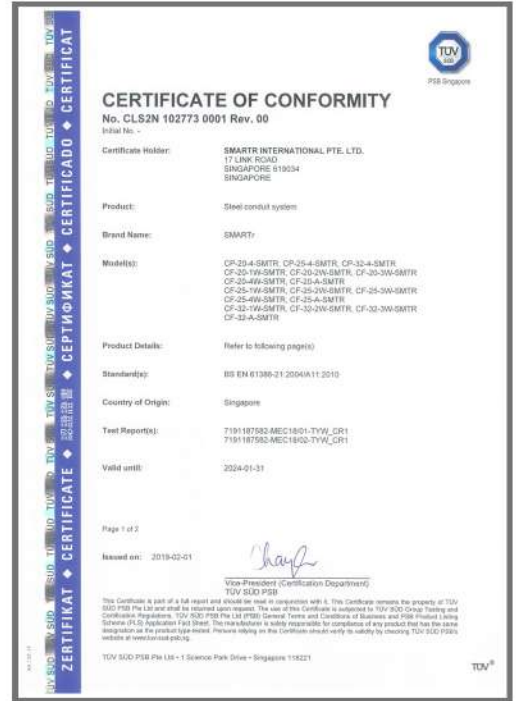

SPACING SUPPORTS FOR CONDUITS

The following table gives guidance on the spacing of supports for conduit.

NOMINAL SIZE OF CONDUIT (mm)	MAXIMUM DISTANCE BETWEEN SUPPORTS	
	HORIZONTAL RUNS (m)	VERTICAL RUNS (m)
16mm	0.75	1.0
17 - 25mm	1.75	2.0
26 - 40mm	2.0	2.25
Over 40mm	2.25	2.5

This table is based on the 16th edition of the I.E.E Wiring Regulations Appendix 11. These tables are for guidance only and account needs to be taken of future wiring needs.

BOXES - CIRCULAR, SMALL

TERMINAL BOX - 1 WAY

ITEM CODE	SIZE	CLASS	BOX/CTN QTY
CF-20-1W-SMTR	20mm	4	10/100
CF-25-1W-SMTR	25mm	4	10/100
CF-20-1W	20mm	3	10/100
CF-25-1W	25mm	3	10/100



THROUGH BOX - 2 WAYS

ITEM CODE	SIZE	CLASS	BOX/CTN QTY
CF-20-2W-SMTR	20mm	4	10/100
CF-25-2W-SMTR	25mm	4	10/100
CF-20-2W	20mm	3	10/100
CF-25-2W	25mm	3	10/100



ANGLE BOX - 2 WAYS

ITEM CODE	SIZE	CLASS	BOX/CTN QTY
CF-20-A-SMTR	20mm	4	10/100
CF-25-A-SMTR	25mm	4	10/100
CF-20-A	20mm	3	10/100
CF-25-A	25mm	3	10/100



TEE BOX - 3 WAYS

ITEM CODE	SIZE	CLASS	BOX/CTN QTY
CF-20-3W-SMTR	20mm	4	10/100
CF-25-3W-SMTR	25mm	4	10/100
CF-20-3W	20mm	3	10/100
CF-25-3W	25mm	3	10/100



CROSS BOX - 4 WAYS

ITEM CODE	SIZE	CLASS	BOX/CTN QTY
CF-20-4W-SMTR	20mm	4	10/100
CF-25-4W-SMTR	25mm	4	10/100
CF-20-4W	20mm	3	10/100
CF-25-4W	25mm	3	10/100



TWIN THRU 'H' BOX - 4 WAYS

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-H-SMTR	20mm	10/100
CF-25-H-SMTR	25mm	10/100



TWIN THRU 'U' BOX - 2 WAYS

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-U-SMTR	20mm	10/100
CF-25-U-SMTR	25mm	10/100



BRANCH 'Y' BOX - 3 WAYS

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-Y-SMTR	20mm	10/100
CF-25-Y-SMTR	25mm	10/100



BOXES WITH BACK HOLE OUTLET

ITEM CODE	TYPE	SIZE	BOX/CTN QTY
CF-20-1W-BO-SMTR	1 Way	20mm	10/100
CF-20-2W-BO-SMTR	2 Way	20mm	10/100
CF-20-3W-BO-SMTR	3 Way	20mm	10/100
CF-20-4W-BO-SMTR	4 Way	20mm	10/100
CF-20-A-BO-SMTR	Angle	20mm	10/100
CF-25-1W-BO-SMTR	1 Way	25mm	10/100
CF-25-2W-BO-SMTR	2 Way	25mm	10/100
CF-25-3W-BO-SMTR	3 Way	25mm	10/100
CF-25-4W-BO-SMTR	4 Way	25mm	10/100
CF-25-A-BO-SMTR	Angle	25mm	10/100



TERMINAL BOX - 1 WAY W/BACK HOLE

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-1W-H-SMTR	20mm	10/100
CF-25-1W-H-SMTR	25mm	10/100

BACK OUTLET HOLE SIZE	
SIZE OF BOX	BACK-HOLE DIAMETER
20mm	20mm
25mm	25mm

Note :
- Also available upon request in 2, 3, Angle & 4 Way Box



LOOPING BOX

ITEM CODE	SIZE	BOX/CTN QTY
CF-LP-SMTR	-	10/100

Note :
- Also available upon request with Back Hole 20/25mm



Marking : SMART^{Tr}
Material : Malleable Iron - BS EN 61386 - 21 :2004
Finishing : Hot-Dipped Galvanized to BS EN ISO 1461
: BS EN 61386 - 21 :2004 (Class 3 boxes in Cast Iron & Galvanized Finish)

Depth of boxes:
- 20mm at min 25mm, tapped with M4 hole at 50.8mm centres
- 25mm at min 28mm, tapped with M4 hole at 50.8mm centres

Note :
- Boxes come with tapped hole at base for earthing screw
- Covers and M4 fixing screws are supplied separately
- 20mm or 25mm fittings are used for BS4568 Class 4, Class 3 Conduits

SMART^r BRITISH STANDARD CONDUIT FITTINGS & ACCESSORIES

BOXES - CIRCULAR, LARGE

TERMINAL BOX - 1 WAY

ITEM CODE	SIZE	BOX/CTN QTY
CF-32-1W-SMTR	32mm	5/25



THROUGH BOX - 2 WAYS

ITEM CODE	SIZE	BOX/CTN QTY
CF-32-2W-SMTR	32mm	5/25



ANGLE BOX - 2 WAYS

ITEM CODE	SIZE	BOX/CTN QTY
CF-32-A-SMTR	32mm	5/25



TEE BOX - 3 WAYS

ITEM CODE	SIZE	BOX/CTN QTY
CF-32-3W-SMTR	32mm	5/25



CROSS BOX - 4 WAYS

ITEM CODE	SIZE	BOX/CTN QTY
CF-32-4W-SMTR	32mm	5/25



Marking : SMART^r

Material : Malleable Iron - BS EN 61386 - 21 :2004

Finishing : Hot-Dipped Galvanized to BS EN ISO 1461

Note :

- Boxes come with tapped hole at base for earthing screw
- Covers and fixing screws are supplied separately
- Physical dimension for 38mm/50mm boxes supplied upon request

SIZES		CONDUIT
32mm	Min 37.5mm deep, tapped M4 at 71.5mm centres	BS EN 61386 CL3/4

EXTENSION RING



CIRCULAR BOX EXTENSION RING

ITEM CODE	SIZE	BOX/CTN QTY
CF-38-ER	38mm	10/100

Material : Malleable Iron

Finishing : Hot-Dipped Galvanized

Note :

- Supplied with 50mm fixing centre holes (for small circular boxes)
- Suitable for increasing height of conduit boxes into deep pattern boxes
- Steel material is available for order
- Covers and Screws are not included
- Unbranded

COVERS

CIRCULAR COVER - SMALL/LARGE

ITEM CODE	SIZE	BOX/CTN QTY
CF-C-SMTR	SMALL (20mm/25mm Boxes)	5/100
CF-C-32	LARGE (32mm Boxes)	4/500

Marking : SMART^{tr}
Material : Steel
Finishing : Plain Galvanized
Thickness : 1mm/2mm

Note :
 - Screws are supplied separately
 - Hot-Dipped Galvanized available for order
 - Suitable Rubber Gasket available for order



RUBBER GASKET

ITEM CODE	SIZE	BOX/CTN QTY
CF-GASKET	SMALL (20MM/25MM BOXES)	10/1000



BALL & SOCKET

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-BSC-HDG	20mm	10/200
CF-25-BSC-HDG	25mm	10/200

Material : Malleable Iron
Finishing : Hot-Dipped Galvanized

Note :
 - Supplied with 50.5mm fixing centre holes with attached earth wire
 - Also available in Steel



DOME LID

ITEM CODE	SIZE	BOX/CTN QTY
CF-DC-20-SMTR	20mm	10/200
CF-DC-25-SMTR	25mm	10/200

Marking : SMART^{tr}
Material : Malleable Iron
Finishing : Hot-Dipped Galvanized

Note :
 - Steel material available for order
 - With mounting holes 50.5mm centre use for connecting flexible adaptors, hanging light fittings, etc.



BENDS, ELBOWS & TEES



INSPECTION ELBOW

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-IE-SMTR	20mm	10/200
CF-25-IE-SMTR	25mm	10/200
CF-32-IE-SMTR	32mm	10/100

Marking : SMART^{tr}
Material : Malleable Iron
Finishing : Hot-Dipped Galvanized
Note :
 - Lid and Steel Screws included



INSPECTION TEE

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-IT-SMTR	20mm	10/100
CF-25-IT-SMTR	25mm	10/100
CF-32-IT-SMTR	32mm	TBA

Marking : SMART^{tr}
Material : Malleable Iron
Finishing : Hot-Dipped Galvanized
Note :
 - Lid and Steel Screws included



INSPECTION BEND

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-IB-SMTR	20mm	10/200
CF-25-IB-SMTR	25mm	10/100
CF-32-IB-SMTR	32mm	10/50

Marking : SMART^{tr}
Material : Malleable Iron
Finishing : Hot-Dipped Galvanized
Note :
 - Lid and Steel Screws included



SOLID BEND

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-BEND-SMTR	20mm	10/100
CF-25-BEND-SMTR	25mm	10/100
CF-32-BEND-SMTR	32mm	10/50

Marking : SMART^{tr}
Material : Malleable Iron
Finishing : Hot-Dipped Galvanized
Angle : 90°
Note :
 - Supplied with internal threaded



SOLID LONG BEND

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-LB-SMTR	20mm	10/200
CF-25-LB-SMTR	25mm	10/100
CF-32-LB-SMTR	32mm	10/50
CF-38-LB-SMTR	38mm	TBA
CF-50-LB-SMTR	50mm	TBA

Material : Steel
Finishing : Hot-Dipped Galvanized
Angle : 90°
Note :
 - Special non-standard bends available for order
 - Supplied with external threaded c/w socket

SMART^r FITTINGS & ACCESSORIES

COUPLINGS

COUPLING

HDG

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-S-SMTR	20mm	10/1000
CF-25-S-SMTR	25mm	10/500
CF-32-S-SMTR	32mm	10/400

G.I.

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-S-GI	20mm	10/1000
CF-25-S-GI	25mm	10/500
CF-32-S-GI	32mm	10/400

Material : Steel

Finishing : Plain Galvanized / Hot-Dipped Galvanized optional

Note : - 38mm/50mm HDG Sockets also available
- No brand marking on Coupler



FLANGE COUPLING

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-FC	20mm	10/250
CF-25-FC	25mm	10/250
CF-32-FC	32mm	10/150

Material : Malleable Iron / Steel (optional)

Finishing : Hot-Dipped Galvanized

Note :

- Complete with washer and male brush
- No brand marking on Coupler



SCREWLESS COUPLING

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-SC	20mm	10/600
CF-25-SC	25mm	10/500
CF-32-SC	32mm	10/300

Material : Steel

Finishing : Galvanized

Note :

- Hot-Dipped Galvanized available upon request
- Supplied with Standard Steel Screws
- Brass or Standard Steel Screws are optional
- Most suitable for connection of P.V.C conduit to Steel conduit
- No brand marking on Coupler



EXPANSION COUPLER

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-S-EX	20mm	10/500
CF-25-S-EX	25mm	10/500
CF-32-S-EX	32mm	10/300

Material : Steel

Finishing : Galvanized / Hot-Dipped Galvanized

Note :

- Supplied internal one end threaded and other end plain unthreaded to allow for expansion.
- No brand marking on Coupler



SHORT NIPPLE

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-SN	20mm	10/1000
CF-25-SN	25mm	10/500

Material : Steel

Finishing : Galvanized

Note :

- Larger size available upon request
- No brand marking on Nipple



CONDUIT FIXING

SPACER BAR SADDLE

HDG

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-SB-SMTR	20mm	10/1000
CF-25-SB-SMTR	25mm	10/1000
CF-32-SB-SMTR	32mm	10/500
CF-38-SB-SMTR	38mm	10/400
CF-50-SB-SMTR	50mm	10/250

G.I.

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-SB	20mm	10/1000
CF-25-SB	25mm	10/1000
CF-32-SB	32mm	10/500

Finishing : Galvanized (Standard) Hot Dipped Galvanized (Optional)

Standard : BS4568 : Part 2 : 1970



Marking : SMART^r

Material : Base - Steel Strap - Steel

Note :

- Supplied with Standard Steel Screws
- Brass or Stainless Steel Screws optional

HEAVY DUTY - DISTANCE SADDLE

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-DS-SMTR	20mm	10/500
CF-25-DS-SMTR	25mm	5/250

Marking : SMART^r

Material : Base - Malleable Iron

Strap - Hot-Dipped Galvanized Steel

Note :

- Suitable for use when installing conduit in wet/hostile environment
- Supplied with Standard Steel Screws
- Brass or Stainless Steel Screws optional
- Spacing distance - 5mm



CONDUIT FIXING

HALF SADDLE

ITEM CODE	SIZE	BOX/CTN QTY
CF-34-HS	20mm	5/2000
CF-1-HS	25mm	5/2000
CF-32-HS-SMTR	32mm	10/1000



Marking : SMART^{Tr}

Material : Steel

Finishing : Galvanized

Note :

- Suitable for temporary installation of conduits / flexible conduit
- Hot-Dipped Galvanized available for order
- Special size for Flexible Conduit available on order

CONDUIT PIPE CLAMP

ITEM CODE	SIZE	BOX/CTN QTY
SSA-COND-CLAMP-20	20mm	20/500
SSA-COND-CLAMP-25	25mm	20/500
SSA-COND-CLAMP-32	32mm	20/500
SSA-COND-CLAMP-38	38mm	20/300
SSA-COND-CLAMP-50	50mm	TBA
SSA-COND-CLAMP-100	100mm	TBA
SSA-COND-CLAMP-150	150mm	TBA



Marking : SMART^{Tr}

Material : Steel

Finishing : Pre-Galvanized / Hot-Dipped Galvanized

Note :

- Supplied with Standard Steel Screws
- Brass or Stainless Steel Screws optional
- Larger size pipe clamp available upon request
- No brand marking on product

KON CLIP

ITEM CODE	SIZE	BOX/CTN QTY
CF-KC-20	20mm	20/800
CF-KC-25	25mm	20/800
CF-KC-K32	32mm	20/600



Material : Steel

Finishing : Hot-Dipped Galvanized

Note :

- For installing conduit or cable onto threaded rod
- No brand marking on product

PLAIN SADDLE

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-PS-SMTR	20mm	5/2000
CF-25-PS-SMTR	25mm	5/2000
CF-32-PS-SMTR	32mm	10/1000



Marking : SMART^{Tr}

Material : Steel

Finishing : Galvanized (Standard)

Note :

- Hot-Dipped Galvanized available for order
- Larger size available for order

PIPE HANGER

HDG

ITEM CODE	SIZE	BOX/CTN QTY
SSA-PIPE HANGER 20MM	20mm	400
SSA-PIPE HANGER 25MM	25mm	350
SSA-PIPE HANGER 32MM	32mm	300
SSA-PIPE HANGER 50MM	50mm	TBA



G.I.

ITEM CODE	SIZE	BOX/CTN QTY
SSA-PIPE HANGER 20MM-G.I	20mm	400
SSA-PIPE HANGER 25MM-G.I	25mm	350
SSA-PIPE HANGER 32MM-G.I	32mm	300

Material : Steel

Note :

- Also available in Hot-Dipped Galvanized
- No brand marking on product

REDUCERS / PLUGS

CONDUIT PIPE REDUCER

TINNED

ITEM CODE	SIZE	BOX/CTN QTY
CF-R-20X25	20mm X 25mm	20/1000
CF-R-32X25	25mm X 32mm	20/500

BRASS

ITEM CODE	SIZE	BOX/CTN QTY
CF-R-20X25-B	20mm X 25mm	20/1000
CF-R-32X25-B	25mm X 32mm	20/500



Material : Alloy / Brass

Finishing : Plain Galvanized

Note :

- For conduit size reducing
- Other sizes of conduit reducers are available upon request

STOPPING PLUG

ITEM CODE	SIZE	BOX/CTN QTY
CF-SP-20	20mm	10/1000
CF-SP-25	25mm	10/1000
CF-SP-32	32mm	5/250



Material : Alloy / Brass

Finishing : Plain

Note :

- Hexagonal/slotted head stop plug to plug off unutilised sprouts on conduit junction boxes
- Large size is also available upon request

BUSHINGS



SHORT MALE BUSH

ITEM CODE	SIZE	BOX/CTN QTY
BF-MB-20-N	20mm	20/2000
BF-MB-25-N	25mm	20/2000
BF-MB-32-N	32mm	20/1000
BF-MB-38-N	38mm	TBA
BF-MB-50-N	50mm	TBA
BF-MB- 2 -N	2"	TBA

Material : Brass

SHORT FEMALE BUSH

ITEM CODE	SIZE	BOX/CTN QTY
BF-FB-20-N	20mm	20/2000
BF-FB-25-N	25mm	20/2000
BF-FB-32-N	32mm	20/1000
BF-FB-38-N	38mm	TBA
BF-FB-50-N	50mm	TBA

Material : Brass



LONG MALE BUSH

ITEM CODE	SIZE	BOX/CTN QTY
BF-MB-20-L	20mm	20/2000
BF-MB-25-L	25mm	20/1000
BF-MB-32-L	32mm	TBA
BF-MB-38-L	38mm	TBA
BF-MB-50-L	50mm	TBA

Material : Brass

LOCKNUTS

LOCKING RING

ITEM CODE	SIZE	BOX/CTN QTY
CF-20-LR	20mm	20/5000
CF-25-LR	25mm	20/3000

Material : Steel

Finishing : Galvanized

Note :

- For locking conduit to junction boxes



LOCKNUT

ITEM CODE	ITEM CODE	SIZE	BOX/CTN QTY
ALLOY	BRASS		
CF-20-LN	BF-LN-20	20mm	20/5000
CF-25-LN	BF-LN-25	25mm	20/3000
CF-32-LN	BF-LN-32	32mm	20/2000

Material : Steel / Brass

Finishing : Galvanized

Note :

- For locking conduit to junction boxes

- Available in Tinned Finish



SMARTr BRITISH STANDARD SWITCH & SOCKET BOXES / ADAPTABLE BOXES

KNOCK-OUT BOXES (SWITCH & SOCKET BOXES)



1 GANG K.O. BOX

ITEM CODE	TYPE	SIZE (mm)	THICKNESS (mm)
KO-1-SMTR	NORMAL	75(W) x 75(L) x 35(D)	1.1 ~ 1.2
KO-1-S-D	DEEP	75(W) x 75(L) x 47(D)	1.1 ~ 1.2
KO-1-S	NORMAL	75(W) x 75(L) x 35(D)	0.8 ~ 0.9

Marking : SMARTr

Material : Steel

Standard : BS4662 : 1970

Finishing : Plain Galvanized

: Hot-Dipped Galvanized (on order)

: 1 adjustable lug


: 1 regulation earth terminal

Note :

- Available mixed 20mm & 25mm K.O. holes

- Plain Lids available for order

- 100 pcs / carton



2 GANG K.O. BOX

ITEM CODE	TYPE	SIZE (mm)	THICKNESS (mm)
KO-2-SMTR	NORMAL	135(W) x 75(L) x 35(D)	1.1 ~ 1.2
KO-2-S-D	DEEP	135(W) x 75(L) x 47(D)	1.1 ~ 1.2
KO-2-S	NORMAL	135(W) x 75(L) x 35(D)	0.8 ~ 0.9

Marking : SMARTr

Material : Steel

Standard : BS4662 : 1970

Finishing : Plain Galvanized

: Hot-Dipped Galvanized (on order)

: 1 adjustable lug

: 1 regulation earth terminal

Note:

- Available mixed 20mm & 25mm K.O. holes

- Plain Lids available for order

- 50 pcs / carton

KNOCK-OUT BOXES WITH "FISH TAIL"

SMARTr "Fish Tail" K.O. Boxes are available in standard 35mm depth (normal pattern) with the 47mm deep pattern type available upon special order.

These boxes are designed with sets of "Fish Tails" welded to the boxes to withstand heavy duty areas like tunnels and civil defence bomb shelters amongst other applications.



1 GANG K.O. BOX - WITH "FISH TAIL"

ITEM CODE	TYPE	SIZE (mm)	THICKNESS (mm)
KO-1-SMTR-FT	NORMAL PATTERN WELDED FISHTAIL	75(W) x 75(L) x 35(D)	MIN 1.1

Marking : SMARTr

Material : Steel

Standard : BS4662 : 1970

Finishing : Hot-Dipped Galvanized

Features : 1 x fix regulation earth terminal

8 x 20mm K.O. holes

c/w 2x Welded Fish Tail

Note :

- Plain Lids available for order

- 100 pcs / carton



2 GANG K.O. BOX - WITH "FISH TAIL"

ITEM CODE	TYPE	SIZE (mm)	THICKNESS (mm)
KO-2-SMTR-FT	NORMAL PATTERN WELDED FISHTAIL	135(W) x 75(L) x 35(D)	MIN 1.1

Marking : SMARTr

Material : Steel

Standard : BS4662 : 1970

Finishing : Hot-Dipped Galvanized

Features : 1 x fix regulation earth terminal

10 x 20mm K.O. holes

c/w 4x Welded Fish Tail

Note :

- Plain lids available for order

- 50 pcs / carton

STEEL ADAPTABLE BOXES

SMARTr heavy duty adaptable boxes can be used as a junction box for installation with electrical conduits ranging from 20mm up to 150mm diameter.

Boxes are supplied without knock out holes to allow users to drill the required holes according to installation needs. The boxes can be supplied with a rubber gasket to improve IP rating to IP54. It could also serve as an utility junction box for wiring connection purposes.



ITEM CODE	SIZE (mm)	PACK QTY
CF-AD-75X75	75(W) x 75(L) x 35(D)	50
CF-AD-100X100X50	100(W) x 100(L) x 50(D)	50
CF-AD-100X100X75	100(W) x 100(L) x 75(D)	40
CF-AD-150X150	150(W) x 150(L) x 75(D)	20
CF-AD-225X225	225(W) x 225(L) x 75(D)	10
CF-AD-300X300	300(W) x 300(L) x 75(D)	5

BODY

Material : Steel, Malleable Iron (Optional)

Finishing : Hot-Dipped Galvanized

Marking : SMARTr **IP Rating** : IP40 / IP54

Note :

- Supplied with Steel Screws as standard

- Brass or Stainless Steel Screws are optional

- Boxes are supplied plain without K.O. holes

- Boxes with K.O. holes can be supplied upon special request

with client's dimensions

- Other size boxes are quoted upon request

FLAT LID

Material : Steel

Finishing : Hot-Dipped Galvanized

FLEXIBLE CONDUIT SYSTEMS

STEEL FLEXIBLE CONDUIT

Flexible Material : Electro-Galvanized Steel
Properties : Provides strong protection for cables
Temp range : -50 degC to +350 degC
IP Rating : IP40
Construction : Highly flexible steel conduit offers excellent mechanical protection
Features : Ideal for general wiring installations and provides good flexible bending and vibration applications
Standard : BS731 (where applicable)

SELECTION CHART

DESCRIPTIONS	SIZE	ITEM CODE	PACKING PER COIL	O.D.	COMPATIBLE WITH ADAPTOR'S CODE
STEEL FLEXIBLE CONDUITS	16mm	FP-16-S-SMTR	100FT	19.0 ± 0.35	BF-FA
	20mm	FP-20-S-SMTR	100FT	22.8 ± 0.35	
	25mm	FP-25-S-SMTR	100FT	28.0 ± 0.40	
	32mm	FP-32-S-SMTR	100FT	36.0 ± 0.40	
	38mm	FP-38-S	50FT	42.5 ± 0.50	
	50mm	FP-50-S-SMTR	50FT	54.5 ± 0.50	
	5/8"	FP-58-S	50FT	5/8" = 16mm	
	3/4"	FP-34-S	50FT	3/4" = 20mm	
	1"	FP-1-S	50FT	1" = 25mm	
	1 1/4"	FP-114-S	100FT	1 1/4" = 32mm	
	1 1/2"	FP-112-S	50FT	1 1/2" = 38mm	
2"	FP-2-S	50FT	2" = 50mm		

PVC COATED FLEXIBLE CONDUIT

Flexible Material : Electro-Galvanized Steel
Jacket Properties : Heat retardant self extinguishing P.V.C Sheath
PVC Color : Black (White/Grey and other colors available upon specific request)
Temp range : -25 degC to +120 degC
IP Rating : IP65 (when installed with suitable water tight adaptors)
Construction : Galvanized Steel core with enhanced low acid P.V.C Sheath
Features : Highly Flexible
Standard : BS731 / BS EN 50086 (where applicable)

SELECTION CHART

DESCRIPTIONS	SIZE	ITEM CODE	PACKING PER COIL	O.D.	COMPATIBLE WITH ADAPTOR'S CODE
PVC COATED G.I FLEXIBLE CONDUITS (Imperial sizes available on order)	16mm	FP-16-PC-SMTR	100FT	19.7 ± 0.35	BF-FA BF-FA-WT BF-FA-T FA-WT
	20mm	FP-20-PC-SMTR	100FT	23.5 ± 0.35	
	25mm	FP-25-PC-SMTR	100FT	28.8 ± 0.40	
	32mm	FP-32-PC-SMTR	100FT	37.0 ± 0.40	
	38mm	FP-38-PC-SMTR	50FT	43.7 ± 0.50	
	50mm	FP-50-PC-SMTR	50FT	55.8 ± 0.50	

LOW SMOKE ZERO HALOGEN (LSOH) COATED FLEXIBLE CONDUIT

Flexible Material : Electro-Galvanized Steel
Jacket Properties : Heat resistant, Low Smoke Halogen free
PVC Color : Black
Temp range : -25 degC to +120 degC
IP Rating : IP65 (when installed with suitable water tight adaptors)
Construction : Flexible with LSOHPVC sheath
Features : Do not emit hazardous gases when heated or in flames
Standard : IEC 61386 (where applicable)

SELECTION CHART

DESCRIPTIONS	SIZE	ITEM CODE	PACKING PER COIL	O.D.	COMPATIBLE WITH ADAPTOR'S CODE
LOW SMOKE ZERO HALOGEN COATED FLEXIBLE CONDUIT (Imperial sizes available on order)	16mm	FP-16-PC-H	100FT	19.8 ± 0.35	BF-FA-T BF-FA-WT FA-WT
	20mm	FP-20-PC-H	100FT	23.6 ± 0.35	
	25mm	FP-25-PC-H	100FT	29.0 ± 0.40	
	32mm	FP-32-PC-H	100FT	37.2 ± 0.40	
	38mm	FP-38-PC-H	50FT	43.9 ± 0.50	
	50mm	FP-50-PC-H	50FT	56.0 ± 0.50	

LIQUID TIGHT FLEXIBLE CONDUIT

Flexible Material : Electro-Galvanized Steel
Jacket Properties : Excellent mechanical strength with flexible capabilities
 : Thick P.V.C Jacket is resistant to oil, acid and sea water
PVC Color : Black (Grey also available in specific order)
Temp range : -25 degC to +150 degC
IP Rating : IP65 (when installed with suitable water tight adaptors)
Standard : BS EN 61386 / BS 731 (where applicable)



SELECTION CHART

DESCRIPTIONS	SIZE	ITEM CODE	PACKING PER COIL	O.D.	COMPATIBLE WITH ADAPTOR'S CODE
LIQUID TIGHT FLEXIBLE CONDUITS (Imperial sizes available on order)	16mm	FP-16-PC-WT-SMTR	100FT	22.0 ± 0.45	FA-WT BF-FA-WT
	20mm	FP-20-PC-WT-SMTR	100FT	26.7 ± 0.50	
	25mm	FP-25-PC-WT-SMTR	100FT	31.9 ± 0.50	
	32mm	FP-32-PC-WT-SMTR	100FT	40.6 ± 0.60	
	38mm	FP-38-PC-WT-SMTR	50FT	47.0 ± 0.70	
	50mm	FP-50-PC-WT-SMTR	50FT	59.0 ± 0.70	

STAINLESS STEEL FLEXIBLE CONDUIT

Flexible Material : Stainless Steel - 304 / 316
Properties : Provides strong protection for cables
Temp range : 50 degC to +350 degC
IP Rating : IP40
Construction : Highly flexible steel conduit offers excellent mechanical & corrosion protection
Features : For special and heavy duty corrosive environment
Standard : BS EN 61386 / BS 731 (where applicable)



SELECTION CHART

DESCRIPTIONS	SIZE	ITEM CODE	PACKING PER COIL	O.D.	COMPATIBLE WITH ADAPTOR'S CODE
STAINLESS STEEL FLEXIBLE CONDUIT	16mm	FP-16-SS-SMTR	100FT	19.0 ± 0.35	BF-FA-T
	20mm	FP-20-SS-SMTR	100FT	23.0 ± 0.35	
	25mm	FP-25-SS-SMTR	100FT	29.0 ± 0.40	
	32mm	FP-32-SS-SMTR	100FT	36.0 ± 0.40	
	38mm	FP-38-SS-SMTR	50FT	42.5 ± 0.50	
	50mm	FP-50-SS-SMTR	50FT	55.0 ± 0.50	

SPACING SUPPORT FOR FLEXIBLE CONDUITS (GUIDANCE)

NOMINAL SIZE OF CONDUIT (mm)	MAXIMUM DISTANCE BETWEEN SUPPORTS	
	HORIZONTAL RUN (m)	VERTICAL RUN (m)
16 and under	0.3	0.5
17 - 25	0.4	0.6
26 - 40	0.6	0.8
Over 40	0.8	1.0

Spacing of Supports for Flexible Conduits

The table gives guidance on the spacing of supports for flexible conduits. To comply with the requirements of the 16th Edition of the I.E.E. wiring regulation flexible conduits shall not be used as a protective conductor.

SMART^r BRITISH STANDARD FLEXIBLE CONDUIT ADAPTORS

FLEXIBLE CONDUIT ADAPTORS

FLEXIBLE ADAPTOR WITH RETAINING SCREW

ITEM CODE	SIZE	CTN QTY
BF-FA-20X58	20mm x 16mm	1000
BF-FA-20X20	20mm x 20mm	1000
BF-FA-25X20	20mm x 25mm	500
BF-FA-25X1	25mm x 25mm	500
BF-FA-32X32	32mm x 32mm	400
BF-FA-2X2	2" x 2"	80



Material : Brass
Finishing : Brass
IP Rating : IP40
Ordering Code : BF-FA

Note:
- Nickel Plate available for order
- No brand marking on product

FEMALE ADAPTOR

ITEM CODE	SIZE	CTN QTY
BF-FFA-20X20	20mm X 20mm	500
BF-FFA-25X1	25mm X 25mm	500



Material : Brass
Finishing : Brass
IP Rating : IP40
Ordering Code : BF-FFA

Note:
- No brand marking on product

NICKEL PLATED ADAPTOR (2PC) MALE ADAPTOR

ITEM CODE	SIZE	CTN QTY
BF-FA-20-T	20mm x 16mm	500
BF-FA-20X20-T	20mm x 20mm	500
BF-FA-25-T	20mm x 25mm	500
BF-FA-25X25-T	25mm x 25mm	300
BF-FA-32X32-T	32mm x 32mm	200



Material : Brass
Finishing : Nickel Plate
IP Rating : IP40
Ordering Code : BF-FA-T

Note:
- Female Adaptor available
on request
- No brand marking on product

LIQUID/WATER TIGHT NICKEL PLATED 2 PART BRASS MALE ADAPTOR (HEAVY GAUGE)

ITEM CODE	SIZE	CTN QTY
BF-FA-20X20-WT	20mm x 20mm	120
BF-FA-25X25-WT	25mm x 25mm	80
BF-FA-32X32-WT	32mm x 32mm	60
BF-FA-38X38-WT	38mm x 38mm	20
BF-FA-50X50-WT	50mm x 50mm	20



Material : Brass
Finishing : Nickel Plate
IP Rating : IP65
Ordering Code : BF-FA-WT

Note:
- Female Adaptor available
on request
- No brand marking on product

LIQUID/WATER TIGHT ADAPTOR

ITEM CODE	SIZE	CTN QTY
FA-WT-20X16	20mm x 16mm	500
FA-WT-20X20	20mm x 20mm	500
FA-WT-25X20	20mm x 25mm	500
FA-WT-25X25	25mm x 25mm	300
FA-WT-32X32	32mm x 32mm	200
FA-WT-38X38	38mm x 38mm	TBA



Material : Steel / Alloy
Finishing : Galvanized
IP Rating : IP65
Ordering Code : FA-WT

Note:
- Angle Adaptor available
on request

SMART^{tr} STAINLESS STEEL CONDUIT & FITTINGS

SS316 STAINLESS STEEL CONDUIT & FITTINGS

BENEFITS OF SS CONDUITS

DURABLE LONG LASTING

HIGHLY CORROSION-RESISTANT

WATER-PROOF CONDUIT BODY

FAST AND CLEAN INSTALLATION

Conduit Systems for Cable Management.
Certified to BS EN Standards:
BS EN 61386, Conduit Systems for Cable Management
Part 1: General Requirements
Part 21: Particular Requirements - Rigid Conduit Systems
Part 25: Particular Requirements - Conduits Fixing Devices



CONDUIT

SPECIFICATIONS

STANDARD	BS EN 61386 PART 1/21/25
MATERIAL	304/316 STAINLESS STEEL
MATERIAL THICKNESS	20M/25MM- 1.5MM
THREAD	ISO FORM 1.5MM PITCH
LENGTH	3.0MTR/LGTH

DESCRIPTION

PART CODE

20MM SS316 CONDUIT 3MTR	CP-20-SS-SMTR
25MM SS316 CONDUIT 3MTR	CP-25-SS-SMTR
20MM SS 1 WAY BOX	CF-20-1W-SS-SMTR
20MM SS 2 WAY BOX	CF-20-2W-SS-SMTR
20MM SS ANGLE BOX	CF-20-A-SS-SMTR
20MM SS 3 WAY BOX	CF-20-3W-SS-SMTR
20MM SS 4 WAY BOX	CF-20-4W-SS-SMTR
20MM SS SOCKET (COUPLER)	CF-20-S-SS
20MM SS SADDLES	CF-20-SB-SS
20MM DISTANCE SADDLES	CF-20-DS-SS-SMTR
25MM SS 1 WAY BOX	CF-25-1W-SS-SMTR
25MM SS 2 WAY BOX	CF-25-2W-SS-SMTR
25MM SS ANGLE BOX	CF-25-A-SS-SMTR
25MM SS 3 WAY BOX	CF-25-3W-SS-SMTR
25MM SS 4 WAY BOX	CF-25-4W-SS-SMTR
25MM SS SOCKET (COUPLER)	CF-25-S-SS
25MM SS SADDLES	CF-25-SB-SS
25MM SS DISTANCE SADDLES	CF-25-DS-SS-SMTR

*Other sizes available upon request

All conduit boxes are supplied with a cover, gasket and screws


*SS Flexible Conduit & other accessories not shown are available upon request

ELECTRICAL METALLIC TUBING (E.M.T.) CONDUIT & FITTINGS

AMERICAN STANDARD ELECTRICAL METALLIC TUBING

SIZE	OUTSIDE DIAMETER		INSIDE DIAMETER		WALL THICKNESS		LENGTH		WEIGHT	
1/2"	0.706"	17.93mm	0.522"	15.80mm	0.042"	1.067mm	10"	3048mm	0.285"	0.424mm
3/4"	0.922"	23.42mm	0.824"	20.93mm	0.049"	1.245mm	10"	3048mm	0.435"	0.647mm
1"	1.163"	29.54mm	1.049"	26.64mm	0.057"	1.448mm	10"	3048mm	0.640"	0.952mm
1 1/4"	1.510"	38.35mm	1.380"	35.05mm	0.065"	1.651mm	10"	3048mm	0.950"	1.414mm
1 1/2"	1.740"	44.20mm	1.610"	40.89mm	0.065"	1.651mm	10"	3048mm	1.100"	1.637mm
2"	2.197"	55.80mm	2.067"	52.50mm	0.065"	1.651mm	10"	3048mm	1.400"	2.083mm
2 1/2"	2.875"	73.03mm	2.731"	69.37mm	0.072"	1.83mm	10"	3048mm	2.052"	3.052mm
3"	3.500"	88.90mm	3.356"	85.24mm	0.072"	1.83mm	10"	3048mm	2.499"	3.716mm
3 1/2"	4.000"	101.60mm	3.834"	97.38mm	0.083"	2.11mm	10"	3048mm	3.316"	4.931mm
4"	4.500"	114.30mm	4.334"	110.08mm	0.083"	2.11mm	10"	3048mm	3.734"	5.554mm

E.M.T. CONDUIT COUPLINGS



SIZE	DIMENSIONS A	DIMENSIONS B	WEIGHT (KG) PER 100
1/2"	38.85mm	21.35mm	3.20kg
3/4"	45.25mm	27.00mm	4.80kg
1"	50.40mm	32.90mm	6.40kg
1 1/4"	63.20mm	44.00mm	17.00kg
1 1/2"	72.70mm	49.05mm	17.60kg
2"	85.35mm	61.60mm	30.50kg


Material : Steel

Finishing : Zinc Electro-Galvanized

Note :

- Coupling sizes above 2-1/2" available upon request

E.M.T. STRAPS



SIZE	DIMENSIONS A	DIMENSIONS B	DIMENSIONS C	DIMENSIONS D	WEIGHT (KG) PER 100	WEIGHT (KG) PER 100*
1/2"	51.00mm	40.80mm	15.90mm	4.65mm	10kg	7.5kg
3/4"	57.75mm	47.00mm	16.00mm	4.65mm	12kg	10kg
1"	66.00mm	56.00mm	18.75mm	4.75mm	16kg	14kg
1 1/4"	84.70mm	74.40mm	18.75mm	4.60mm	20kg	18.2kg
1 1/2"	99.15mm	85.85mm	18.95mm	4.65mm	21kg	19.5kg
2"	106.70mm	88.25mm	18.50mm	4.80mm	31kg	27.9kg


Material : Steel

Finishing : Zinc Electro-Galvanized

Note :

- Details of Strap sizes 2 1/2" ~ 4" are available upon request

E.M.T. ELBOW 90



SIZE	OUTSIDE DIAMETER	WALL THICKNESS	MIN RADIUS (R)	MIN. STRAIGHT LENGTH (LN)	WEIGHT (KG) PER PC
1/2"	17.93mm	1.07mm	103.97mm	68.34mm	0.13kg
3/4"	23.42mm	1.25mm	126.71mm	50.48mm	0.19kg
1"	29.54mm	1.45mm	159.77mm	62.02mm	0.38kg
1 1/4"	38.35mm	1.65mm	204.18mm	52.14mm	0.64kg
1 1/2"	44.20mm	1.65mm	232.10mm	67.71mm	0.88kg
2"	55.80mm	1.65mm	267.90mm	89.59mm	1.30kg

Material : Hot-Rolled Steel Strip

Finishing : Galvanized (Hot-Dipped Galvanized available upon request)

Note :

- Details of Elbow sizes 2 1/2" ~ 4" are available upon request

APPLICATION TOLERANCES OF EMT CONDUITS:

Outside Diameter : ± 0.005in (0.13mm)

Wall Thickness : ± 5-10%

Length : ± 0.25" (6.4mm)

Standard : UL979-2000, CSA C22.2, ANSI C80.3-2005 (where applicable)

Available Finishing : Pre-Galvanized or Zinc Coated Hot-Dipped Galvanized

Note :

- The wall thickness shall not vary more than 0.003" (0.08mm) throughout a 10ft length

FEATURES OF SMART[®] EMT CONDUIT:

- E.M.T conduits are sometimes called thin wall conduits
- Unthreaded, making it easy to coupler and for a faster installation
- Light and easy to carry and handle
- Superior quality finish and good standard export packing

Note :

- Details of coupling sizes 2 1/2" ~ 4" are available upon request

SMARTr[®]

Your Trusted Partner in
Electrical & Mechanical Support

Copyright © 2022 SMARTr International Pte. Ltd. All content, graphics, images contained in this catalogue are protected by copyright laws and/or international treaties, and belong to SMARTr International Pte Ltd. These works, content, graphics or images may not be copied, reproduced or imitated whether in whole or in part, unless expressly permitted by SMARTr International Pte. Ltd.

All product dimensions and material specifications are as accurate as possible at time of print, SMARTr International Pte. Ltd reserves the right to make changes without notice.

The company makes every effort to ensure that the information provided in this catalogue is accurate. However, the company cannot guarantee this and accepts no liability for the use or interpretation of this data.